


Our patented SURFIX® nozzle has been developed for environmentally friendly removal of surfaces and surface coatings where no further processing is needed. This special nozzle can be used in combination with all our abrasive mixing units.

After using the WAS technology with the SURFIX® the surface is abraded and can be finished again immediately.

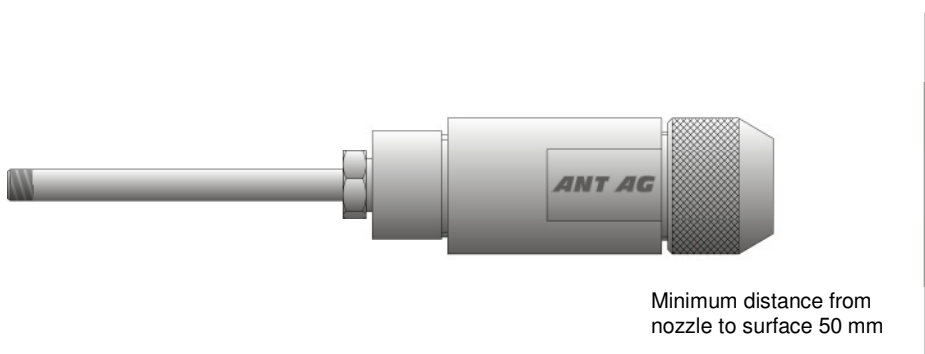

	<b>SURFIX 2000</b>	<b>SURFIX 700</b>
Maximum working pressure	2000 bar	700 bar
Hydraulic power at the nozzle	57,3 kW	7 kW
Water flow	17,2 l/min	6 l/min
Abrasive concentration	10% (mass)	10% (mass)
Nozzle size	0,8 mm	0,6 mm

### **Cutting performance**

Removal of standard coatings like paint layers	up to 16 m <sup>2</sup> /h	up to 5 m <sup>2</sup> /h
Removal/cutting of standard concrete	up to 0,13 m <sup>3</sup> /h	up to 0,04 m <sup>3</sup> /h

### **Service life**

	up to 20 hours	up to 30 hours
--	----------------	----------------